
☐ Include in patent order

MicroPatent® Worldwide PatSearch: Record 283 of 705

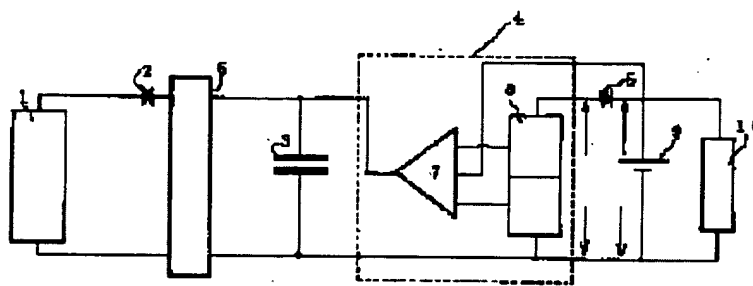

Family Lookup

JP09215224

PORTABLE POWER SUPPLY UNIT WITH BATTERY CHARGER

YAMAMOTO SHIGEO

Inventor(s): YAMAMOTO SHIGEO

Application No. 08015347, Filed 19960131, Published 19970815

Abstract:

PROBLEM TO BE SOLVED: To improve largely the life of a secondary battery, by providing a next stage secondary battery which feeds a power to its subsequent load and is charged by the output of a


DC-DC converter for increasing the voltage of a secondary battery for charging to feed a power to the foregoing next stage.

SOLUTION: A DC-DC converter 4 is a DC-AC-DC conversion type one which operates even when the voltage of a secondary battery 3 for charging becomes lower than the voltage of a next stage battery 9, and feeds a power to the next stage secondary battery 9 via a diode 5 both for preventing a reverse current and for controlling a voltage. Further, in the case of using the voltage of a constant-voltage secondary battery 3 as a reference voltage, when the output voltage of a comparison circuit 7 is higher than the reference voltage, after the output voltage is converted into an AC voltage via a chopper circuit, the AC voltage is lowered to the charging voltage of the ordinary secondary battery 9 by a step-down circuit to charge the battery 9 via the voltage controlling diode 5. Also, when being lower than the reference voltage, the AC voltage is increased to the charging voltage of the ordinary secondary battery 9 by a step-up circuit to charge the battery 9. As a result, a battery charging power supply capable of a long-time charging is obtained.

Int'l Class: H02J00735 H01G009155 H01L03104 H01M01046 H02N00600

MicroPatent Reference Number: 000791926

COPYRIGHT: (C) 1997 JPO

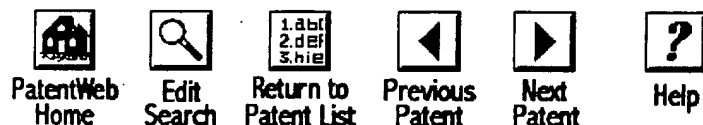

For further information, please contact:
[Technical Support](#) | [Billing](#) | [Sales](#) | [General Information](#)